

GLAX 2 2.0 A

CORNER ENTRY, 2 SLIDING DOORS + 2 FIXED PANELS


Design Marco Pellici




Dimensions				Code	Installation		Mixer		Glass	Select the finishing				
Dimensions (cm)	Shower tray (cm)	Total height (cm)	Access (cm)		D	S	M	T	1	UH	UU	HU	BB	TU
		C	*		Right	Left	Manual	Thermo-static	Clear	White	Total White	Black	Silver	Corda
HYDRO														
					D	S	M1-	T1-	1	UH	UU	HU	BB	TU
80 X 80	4,5	210	40	G22A80	-	-								
80 X 80	11,5	217	40	G22A89	-	-								
90 X 90	4,5	210	47	G22A90	-	-								
90 X 90	11,5	217	47	G22A99	-	-								
100 X 100	4,5	210	54	G22A100	-	-								
100 X 100	11,5	217	54	G22A109	-	-								
90 X 70	4,5	210	40	G22A9070										
90 X 70	11,5	217	40	G22A9079										
100 X 70	4,5	210	43,5	G22A107										
100 X 70	11,5	217	43,5	G22A197										
100 X 80	4,5	210	47,5	G22A108										
100 X 80	11,5	217	47,5	G22A198										
HYDRO PLUS														
					D	S	M1L-	T1L-	1	UH	UU	HU	BB	TU
80 X 80	4,5	210	40	G22A80	-	-								
80 X 80	11,5	217	40	G22A89	-	-								
90 X 90	4,5	210	47	G22A90	-	-								
90 X 90	11,5	217	47	G22A99	-	-								
100 X 100	4,5	210	54	G22A100	-	-								
100 X 100	11,5	217	54	G22A109	-	-								
90 X 70	4,5	210	40	G22A9070										
90 X 70	11,5	217	40	G22A9079										
100 X 70	4,5	210	43,5	G22A107										
100 X 70	11,5	217	43,5	G22A197										
100 X 80	4,5	210	47,5	G22A108										
100 X 80	11,5	217	47,5	G22A198										
HAMMAM														
					D	S	M5-	T5-	1	UH	UU	HU	BB	TU
80 X 80	4,5	210	40	G22A80	-	-								
80 X 80	11,5	217	40	G22A89	-	-								
90 X 90	4,5	210	47	G22A90	-	-								
90 X 90	11,5	217	47	G22A99	-	-								
100 X 100	4,5	210	54	G22A100	-	-								
100 X 100	11,5	217	54	G22A109	-	-								
90 X 70	4,5	210	40	G22A9070										
90 X 70	11,5	217	40	G22A9079										
100 X 70	4,5	210	43,5	G22A107										
100 X 70	11,5	217	43,5	G22A197										
100 X 80	4,5	210	47,5	G22A108										
100 X 80	11,5	217	47,5	G22A198										



GLAX 2 2.0 A TOTAL WHITE

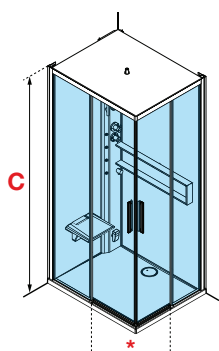

S Left



D Right




GLAX 2 2.0 | FINISHES

	PROFILE	HANDLES	EQUIPPED PANEL + SOAP HOLDER	BACK WALL PANELS	SHOWER TRAY	DOME *	SEAT *
WHITE	Black soft	Black soft	Soft white	Black	Soft white	Soft white	White
TOTAL WHITE	Soft white	Soft white	Soft white	White	Soft white	Soft white	White
BLACK	Soft white	Soft white	Black soft	White	Materic black	Black soft	White
SILVER	Silver	Chrome	Silver	White	Shiny white	Soft white	White
CORDA	Soft white	Soft white	Corda	White	Materic corda	Corda	White

* available depending on the model

GLAX 2 2.0 | FUNCTIONS AND EQUIPMENT (available depending on the model)




-  Manual or Thermostatic mixer and Hand shower
-  Dome with Shower head
-  Body hydromassage
-  Soap holder
-  Bluetooth
-  Foldaway seat
-  Eletronic soft-touch control panel
-  Chromolight (hammam+hydro plus version)
Led ceiling (hydro version)
-  Steam generator + Steam and aroma dispenser



GLAX 2 2.0 2P CORDA



Clean and contemporary design with large glass surfaces and few profiles. The glass roof is integrated into the edge of the top profiles



The white LED light or with chromolight program, is integrated into the column





Relaxing and tonic vertical hydromassage




Emotional and sensorial experience by the steam generator and aroma diffuser.





GLAX 2 2.0

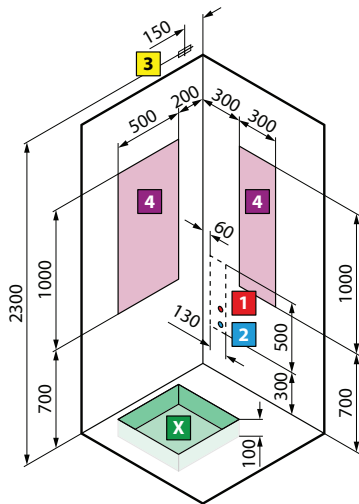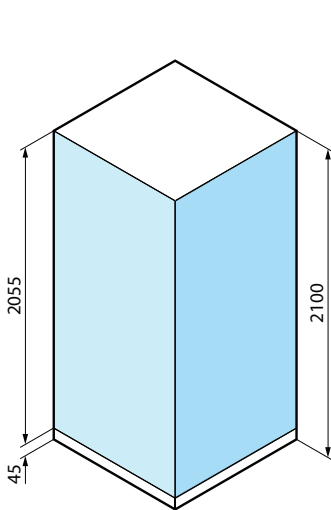


for model
**A80 - A90 - A100 - GF80 -
GF90 - R90 - R100**

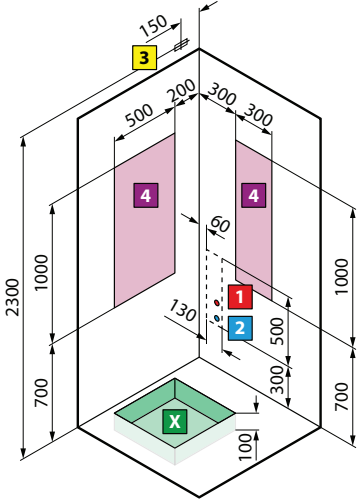

right version
for model **A90x70 - A100x70 - A100x80 -
2P120x80 - 2P120x90**

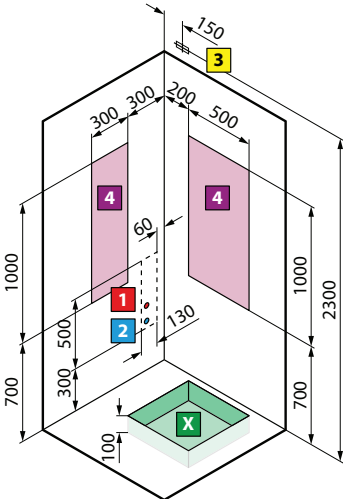


model	A ± 3	B ± 3
A80	796	796
A90	896	896
A 100	996	996
GF80	796	796
GF90	896	896




model	A ± 3	B ± 3
R90	896	896
R100	996	996




S VERSION LEFT



D VERSION RIGHT



model	A ± 3	B ± 3
A90x70	896	696
A100x70	996	696
A100x80	996	796
2P120x80	1196	796
2P120x90	1196	896



Visual inspection
not possible



WARNING!
It could be dangerous for
pacemaker wearer


HYDRAULIC CHARACTERISTICS:

Optimal dynamic pressure 2÷5 bar
Hot water 1/2"
Cold water 1/2"
Drain connection ø 40 mm


ELECTRICAL CHARACTERISTIC:

Supply voltage: 220-230 V
Frequency: 50/60 Hz
Maximum absorbed power: 2600 W
Nominal power rating: 2500 W


WARNING! Install a 30mA differential switch upstream of the appliance
with a multiple-pole switch with a minimum contact opening ≥ 3 mm.

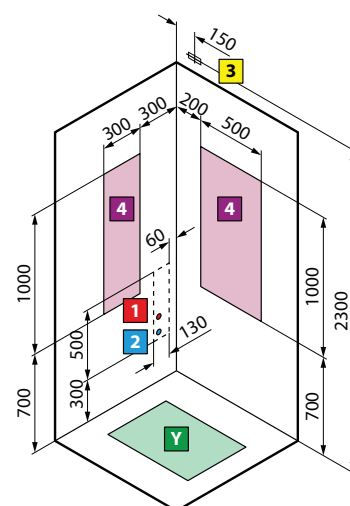

for model **A90x70 - A100x70 - A100x80 -
2P120x80 - 2P120x90**



model	A $\pm$ 4	B $\pm$ 4	E
R90	898	898	500
R100	998	998	600



model	A $\pm$ 4	B $\pm$ 4
A90x70	898	698
A100x70	998	698
A100x80	998	798
2P120x80	1198	798
2P120x90	1198	898



ELECTRICAL CHARACTERISTIC:
Supply voltage: 220-230 V
Frequency: 50/60 Hz
Maximum absorbed power: 2600 W
Nominal power rating: 2500 W

447